


4715MS SERIES AC AXIAL FAN

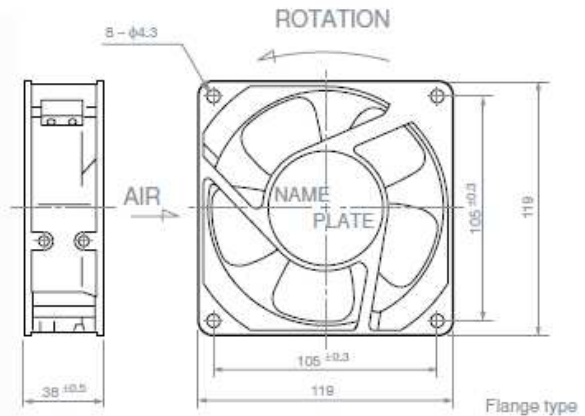

Specification Data:

• Dimensions/Type:	119mm □ x 38mm Axial Fan	• Terminal:	Faston 110 equivalent
• Motor Protection:	B10 ~ B30 Impedance B4A ~ B5A Thermal	• Lead Wire:	UL3266, CSA CL1252, AWG22
• Motor Type:	Shaded Pole Induction Motor	• Weight:	550g
• Temperature Range:		• Rotation Direction:	Counterclockwise
B10~B4A	-40°C ~ +70°C (Operating)	• Airflow Direction:	Out Over Support Struts
B5A	-40°C ~ +60°C (Operating)		
All Classes	-40°C ~ +70°C (Storage)		
• Material:	Casing: Aluminium (Painted) Impeller: Polycarbonate (Glass Filled)		

Model	Product No.	Rated Voltage (V)	Frequency (Hz)	Starting Voltage (V)	Current (A)	Input Power (W)	Speed (RPM)	Max. Airflow (m³/min)	Max. Static Pressure (Pa)	Noise (dBA)
4715MS-12T-B10-	X00	115	50	75	0.090	6.0	1350	1.30	15.6	27.0
		115	60	75	0.080	5.5	1450	1.40	16.6	28.0
4715MS-12T-B20-	X00	115	50	75	0.100	7.0	2100	2.00	35.2	32.0
		115	60	75	0.100	7.0	1950	1.90	24.5	30.0
4715MS-12T-B30-	X00	115	50	75	0.160	11.0	2400	2.30	49.9	34.0
		115	60	75	0.140	10.0	2600	2.50	49.9	37.0
4715MS-12T-B4A-	X00	115	50	75	0.220	15.0	2450	2.40	50.9	35.0
		115	60	75	0.190	13.0	2750	2.70	64.6	39.0
4715MS-12T-B5A-	X00	115	50	65	0.250	15.5	2600	2.50	64.6	37.0
		115	60	65	0.210	14.5	2900	2.90	76.4	41.0
4715MS-23T-B10-	X00	230	50	175	0.050	6.5	1350	1.30	14.7	27.0
		230	60	175	0.045	6.0	1450	1.40	14.7	28.0
4715MS-23T-B20-	X00	230	50	175	0.060	7.5	2100	2.00	35.2	32.0
		230	60	175	0.060	7.5	1900	1.90	21.5	30.0
4715MS-23T-B30-	X00	230	50	175	0.100	12.0	2400	2.30	49.0	34.0
		230	60	175	0.080	11.0	2600	2.50	51.9	37.0
4715MS-23T-B4A-	X00	230	50	175	0.120	15.0	2450	2.40	53.9	35.0
		230	60	175	0.100	13.0	2750	2.70	63.7	39.0
4715MS-23T-B5A-	X00	230	50	175	0.120	15.0	2600	2.50	63.7	37.0
		230	60	175	0.100	14.0	2900	2.90	70.5	41.0

The information above represents typical performance of the product, and is subject to change without notice.
Product performance may be varied or enhanced to meet individual requirements.