

Level Measurement

Continuous level measurement - Ultrasonic transducers

EchoMax XRS-5

Overview



EchoMax XRS-5 ultrasonic transducer provides reliable, continuous level monitoring of liquids and slurries in narrow lift stations/wet wells, flumes, weirs and filter beds using a beam angle of just 10° and a CSM rubber face.

Benefits

- Narrow beam angle of only 10°
- Chemically resistant PVDF copolymer enclosure and CSM rubber face
- Measuring range: 8 m (26 ft) for measurement of liquids and slurries
- Fully submersible: IP68 degree of protection
- Easy installation with 1" NPT or R 1" BSPT connection

Application

The XRS-5 is non-contacting with a measuring range from 0.3 ... 8 m (1 ... 26 ft). Advanced echo processing ensures reliable data even in conditions with obstructions, turbulence and foam.


The hermetically sealed CSM rubber face and the PVDF copolymer enclosure are designed for maximum resistance to methane, salt water, caustics and harsh chemicals common to wastewater installations. With an IP68 degree of protection, this rugged sensor is fully submersible in the event of flood conditions. Use a submergence shield if full submergence is possible in the application. A submergence shield will maintain a high level reading output during submerged conditions.

The low-cost XRS-5 transducer is compatible with a full range of Siemens controllers, from a basic system for high/low alarm or simple pump control, up to advanced control systems with communications, telemetry and SCADA integration capabilities.

- Key Applications: wet wells, flumes, weirs, filter beds

Technical specifications

Mode of operation	
Measuring principle	Ultrasonic transducer
Input	
Measuring range	0.3 ... 8 m (1 ... 26 ft), dependent on application
Output	
Frequency	44 kHz
Beam angle	10°
Accuracy	
Temperature error	Compensated by integral temperature sensor
Rated operating conditions	
Vessel pressure	Normal atmospheric pressure
Ambient conditions	
• Ambient temperature	-20 ... +65 °C (-4 ... +149 ° F)
Design	
Weight (approximate shipping weight of sensor with standard cable length)	1.2 kg (2.6 lb)
Material (enclosure)	PVDF copolymer enclosure and CSM face
Process connection	1" NPT [(Taper), ANSI/ASME B1.20.1] or R 1" [(BSPT), EN 10226]
Degree of protection	IP65/IP68
Cable connection	2-core shielded/twisted, 0.5 mm ² (20 AWG), PVC sheath
Cable (max. length)	<ul style="list-style-type: none"> • 365 m (1 200 ft) with RG 62 A/U coaxial cable • 365 m (1 200 ft) with 2-core twisted pair, foil shield, 0.5 mm² (20 AWG), PVC sheath, only for MultiRanger 100/200
Options	
Flange version	Factory flange with PTFE face for ASME, EN or JIS configuration
Submergence shield	For applications with flooding possible
Certificates and approvals	
CE, RCM, KCC	
CSA Class I, Div. 2, Groups A,B,C,D, Class II, Div. 1 Groups E,F,G	
FM Class I, Zone 1, AEx m IIC, T6 Class II, III, Div. 1, Groups E,F,G T6	
ATEX II 2GD / IECEx / INMETRO Ex mb IIC T6 Gb, Ex tb IIIC T85 °C Db	

Selection and Ordering data		Article No.	Selection and Ordering data		Order code
EchoMax XRS-5 transducer		7ML1106-	Further designs		
With a beam angle of 10°, the XRS-5 provides reliable, continuous level monitoring of liquids and slurries in narrow lift stations/wet wells, flumes, weirs and filter beds. Measuring range: min. 0.3 m (1 ft), max. 8 m (26 ft)			Please add "-Z" to Article No. and specify Order code(s).		
➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.			Acrylic coated, stainless steel tag [13 x 45 mm (0.5 x 1.75 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text		➤ Y17
Process connection			Accessories		Article No.
1" NPT [(Taper), ANSI/ASME B1.20.1]		➤ 1	Tag, stainless steel with hole, 12 x 45 mm (0.47 x 1.77 inch), one text line for fastening on sensors		7ML1930-1BJ
R 1" [(BSPT), EN 10226]		➤ 2	Submergence shield kit		7ML1830-1BH
Cable length			Easy Aimer 2, aluminum, NPT with ¾" x 1" PVC coupling		7ML1830-1AQ
5 m (16.40 ft)		➤ A	Easy Aimer 2, aluminum with M20 adapter and 1" and 1½" BSPT aluminum couplings		7ML1830-1AX
10 m (32.81 ft)		➤ B	Easy Aimer 304, NPT with 1" stainless steel coupling		7ML1830-1AU
30 m (98.43 ft)		➤ C	Easy Aimer 304, with M20 adapter and 1" and 1½" BSPT 304 stainless steel couplings		7ML1830-1GN
Facing			FMS-200 universal box bracket, mounting kit		7ML1830-1BK
Standard (CSM rubber)		➤ A	FMS-210 channel bracket, wall mount		7ML1830-1BL
PTFE (flange versions)		➤ B	FMS-220 extended channel bracket, wall mount		7ML1830-1BM
Approvals			FMS-310 channel bracket, floor mount		7ML1830-1BN
CE, RCM, KCC, CSA Class I, Div. 2, Groups A,B,C,D, Class II, Div. 1 Groups E,F,G		➤ 2	FMS-320 extended channel bracket, floor mount		7ML1830-1BP
FM Class I, Zone 1, AEx m IIC, T6 Class II, III, Div. 1, Groups E,F,G T6 ATEX II 2GD / IECEx / INMETRO Ex mb IIC T6 Gb, Ex tb IIIC T85 °C Db			FMS-350 bridge channel bracket, floor mount (see Mounting Brackets on page 4/187 for more information)		7ML1830-1BQ
Mounting flange (flush mount)			1" NPT locknut, plastic		7ML1830-1DS
None		➤ A	1" BSPT locknut, plastic		7ML1830-1DR
3" ASME, 150 lb, flat faced		B	➤ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ➤. For details see page 9/5 in the appendix.		
4" ASME, 150 lb, flat faced		C			
6" ASME, 150 lb, flat faced		D			
DN 80, PN 10/16, Type A, flat faced		J			
DN 100, PN 10/16, Type A, flat faced		K			
DN 150, PN 10/16, Type A, flat faced		L			
JIS10K 3B style		Q			
JIS10K 4B style		R			
JIS10K 6B style		S			
Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1, or JIS B 2220 standard.					
Operating Instructions		Article No.			
Quick Start Manual, multi-language		A5E32299685			
Applications Guidelines, multi-language		7ML1998-5HV61			
Note: The Applications Guidelines should be ordered as a separate line item on the order.					
This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.					

➤ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ➤. For details see page 9/5 in the appendix.

Level Measurement

Continuous level measurement - Ultrasonic transducers

EchoMax XRS-5


Selection and Ordering data	Article No.
EchoMax XRS-5C transducer With a beam angle of 10°, the XRS-5 provides reliable, continuous level monitoring of liquids and slurries in narrow lift stations/wet wells, flumes, weirs and filter beds. Measuring range: min. 0.3 m (1 ft), max. 8 m (26 ft) ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ML1105-
Process connection 1" NPT [(Taper), ANSI/ASME B1.20.1]	
Cable length 5 m (16.40 ft) 10 m (32.81 ft) 30 m (98.43 ft)	
Facing Standard (CSM rubber) PTFE (flange versions)	
Approvals CSA Class I Div. 1, Groups A,B,C,D; Class II Div. 1, Groups E,F,G; Class III	
Mounting flange (flush mount) None 3" ASME, 150 lb, flat faced 4" ASME, 150 lb, flat faced 6" ASME, 150 lb, flat faced Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1, or JIS B 2220 standard.	
Operating Instructions Quick Start Manual, multi-language Applications Guidelines, multi-language Note: The Applications Guidelines should be ordered as a separate line item on the order. This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.	Article No. A5E32299685 7ML1998-5HV61

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.

Selection and Ordering data	Order code
Further designs Please add "-Z" to Article No. and specify Order code(s). Acrylic coated, stainless steel tag [13 x 45 mm (0.5 x 1.75 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text	◆ Y17
Accessories Submergence shield kit Easy Aimer 2, aluminum, NPT with ¾" x 1" PVC coupling Easy Aimer 304, NPT with 1" stainless steel coupling FMS-200 universal box bracket, mounting kit FMS-210 channel bracket, wall mount FMS-220 extended channel bracket, wall mount FMS-310 channel bracket, floor mount FMS-320 extended channel bracket, floor mount FMS-350 bridge channel bracket, floor mount (see Mounting Brackets on page 4/187 for more information)	Article No. 7ML1830-1BH 7ML1830-1AQ 7ML1830-1AU 7ML1830-1BK 7ML1830-1BL 7ML1830-1BM 7ML1830-1BN 7ML1830-1BP 7ML1830-1BQ

◆ We can offer shorter delivery times for configurations designated with the Quick Ship Symbol ◆. For details see page 9/5 in the appendix.


Dimensional drawings

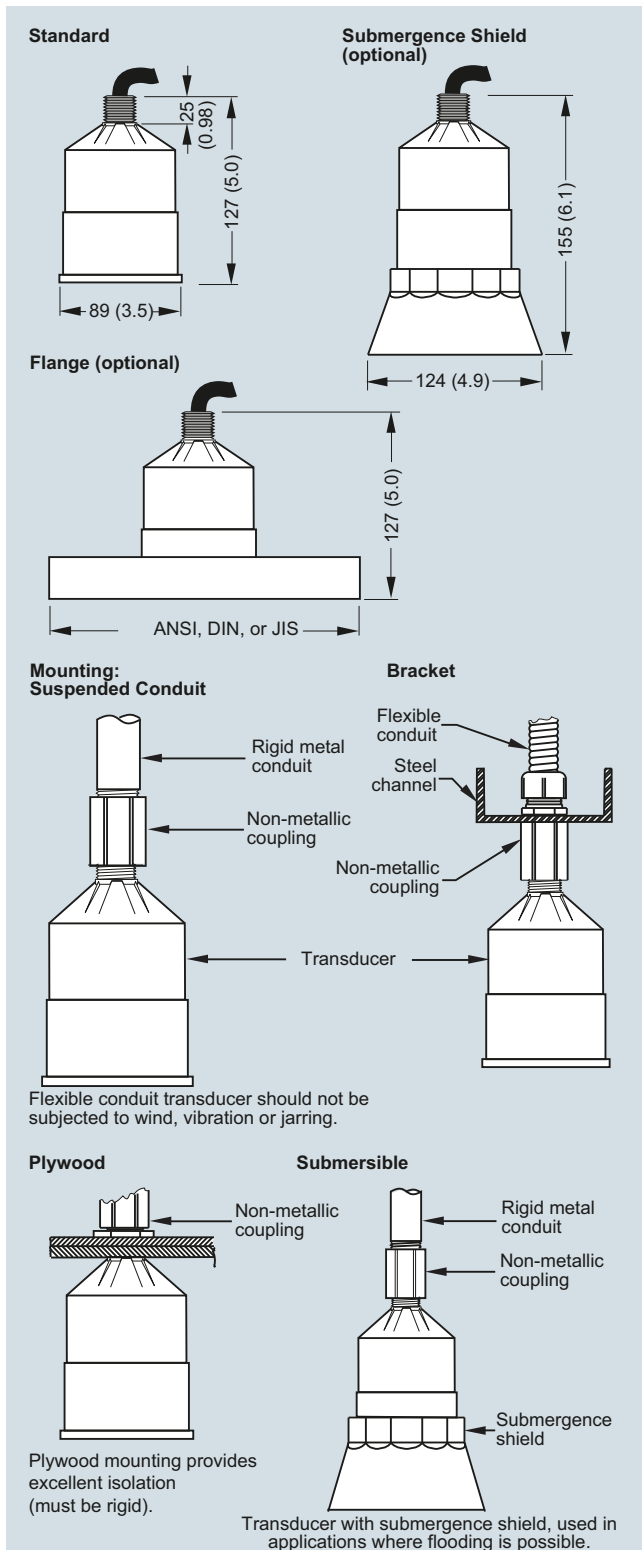


XRS-5 ultrasonic transducer, dimensions in mm (inch)

Schematics


Direct connection

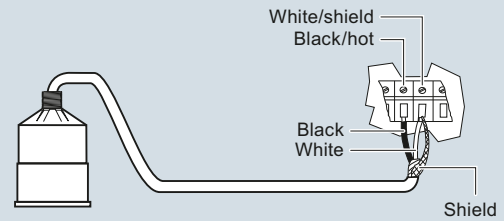


Coaxial extension

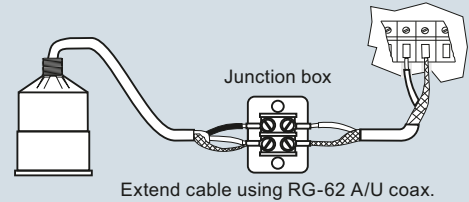

3 terminal direct*

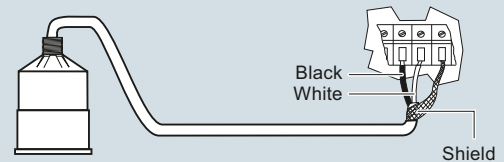

3 terminal extension*

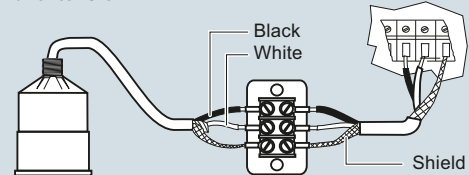

* For SITRANS LUT400, MultiRanger 100/200, HydroRanger 200

XRS-5 ultrasonic transducer connections