

FU-18M

Transmissive Fibre Unit



SPECIFICATIONS

Model		FU-18M ^{*1}
Optical axis diameter (Standard target to be detected)		ø1 mm
Beam emitting direction		Side
Aperture angle		Approx 3°
Fibre unit length		2 m free-cut
Fibre unit diameter		ø1.0
Minimum bend radius		R10 mm
Minimum detectable object		Object with a diameter of 0.02 mm ^{*2}
Environmental resistance	Ambient temperature	-40 to +70 °C
Weight		Approx. 6 g


^{*1} For details on the detecting distance, see the fibre amplifier catalogue.

^{*2} The minimum detectable object is the value when the detecting distance and sensitivity have been set to their optimal state.

Dimensions

* Download CAD file or product manual for larger image/text and more detail.

FU-18M

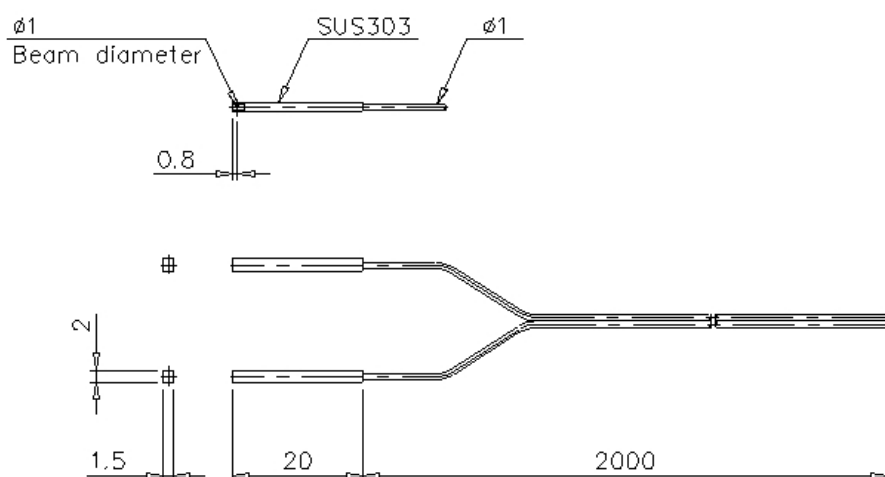

Mounting bracket

